



BULLET Series

The Davies Pumps Bullet Series with twin impellers makes pumping dirty water to high heads possible, capable of 8mm solids up to 25m and flows out to 220 liters per minute. Two models available with float switch for automatic operation, ideal for pumping treated effluent to dripper lines or other high pressure transfer applications.

Pump Features

- Double open impellers
- Inlet strainer
- Float Switch for automatic level control
- In-Winding thermal auto reset overload protector

Technical Features

- Liquid Temperature: 0°C to 40°C.
- pH: 6 to 8.
- Protection class IP68.
- Maximum immersion depth: 6M.
- Maximum solids capacity: 8mm.
- Lead length: 5m.

LBC CAST IRON CUTTER TYPE SUBMERSIBLE

Part No.	HP	W	Volts	Phase	Float Switch	Outlet
240-BULLET 500	0.5	370	230	1	Yes	32mm 1 ¹ / ₄ "
240-BULLET 1000	1.0	750	230	1	Yes	50mm 2"

TREATED EFFLUENT



WATER IRRIGATION






WATER TRANSFERRING



BULLET SERIES

Performance:

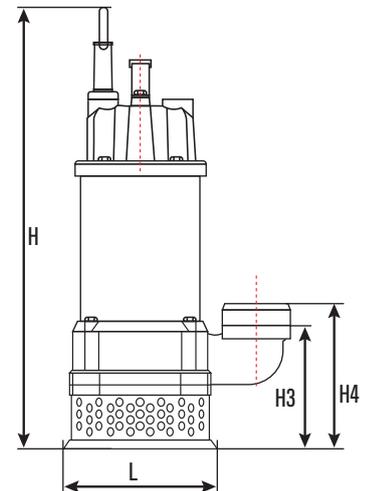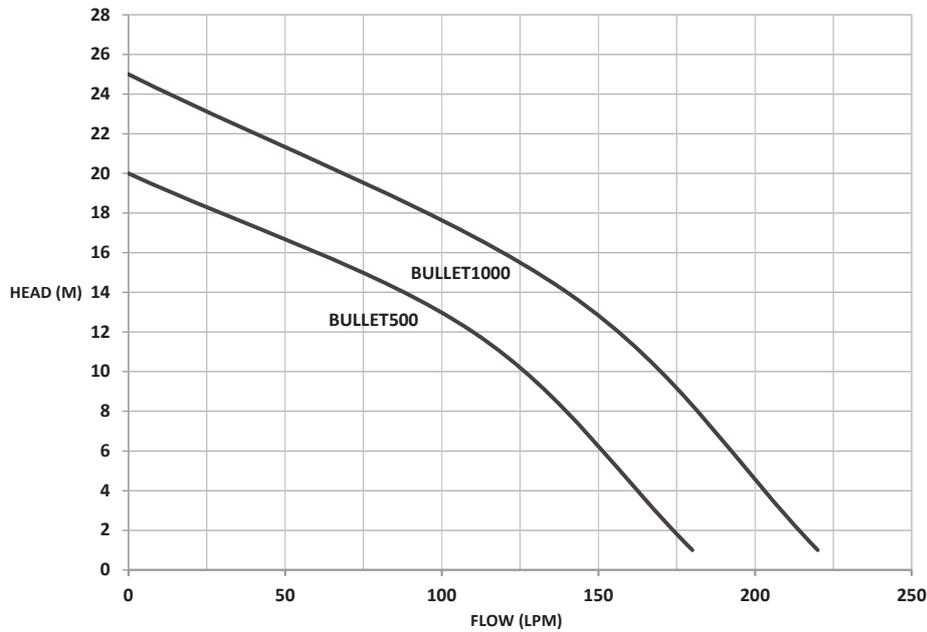

DIMENSIONS AND SPECIFICATIONS

Model	H	H3	H4	W	L
Bullet 500	370	123	-	51	220
Bullet 1000	470	134	160	173	252

For your nearest dealer please contact Argon Distributors: 0508 634 341