



DHM SERIES HORIZONTAL MULTISTAGE PUMPS

The Davies DHM series multistage pumps are built for years of trouble free service. The all stainless steel wet end means there's no corrosion and no nasty's getting into the water plus being multistage they're exceptionally quiet and the most efficient type of house pump available

Features

- 304 Stainless steel impellers, Diffusers, inlet/ outlet chambers
- Long Life Silicon carbide/carbon seal
- Quiet & Low running cost
- Compact design










TECHNICAL DATA

DAVIES DHM2 SERIES						
Model	Нр	Kw (P2)	Kw (P1)	Volts	Phase	Amps
DHM2-30	0.40	0.30	0.48	230	1	2.3
DHM2-40	0.50	0.37	0.57	230	1	2.6
DHM2-50	0.60	0.45	0.68	230	1	3.2
DHM2-60	0.77	0.56	0.81	230	1	3.7


DHM 2 SERIES

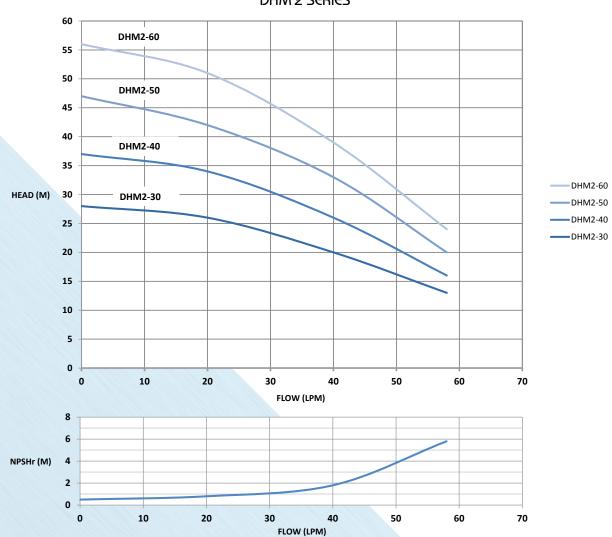



TECHNICAL DATA

DAVIES DHM4 SERIES						
Model	Ηρ	Kw (P2)	Kw (P1)	Volts	Phase	Amps
DHM4-40	0.94	0.7	1.02	230	1	4.3
DHM4-50	1.26	0.92	1.22	230	1	5.4
DHM4-60	1.44	1.05	1.45	230	1	6.2

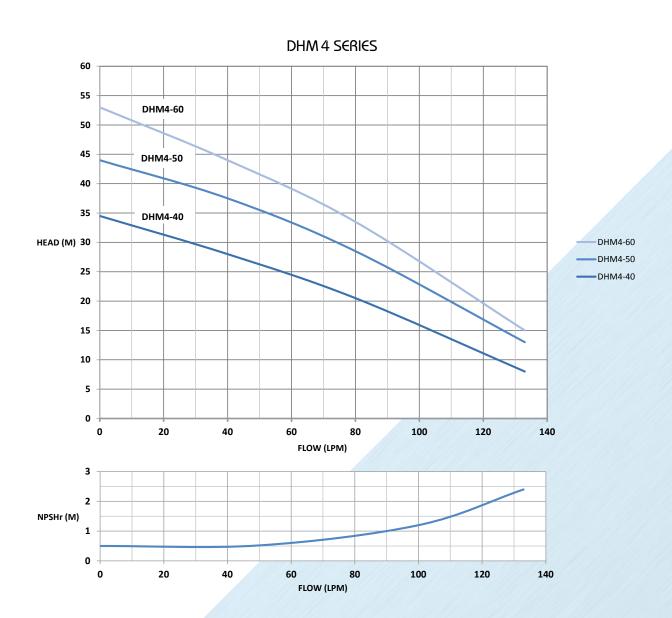



TECHNICAL DATA

CONSTRUCTION DETAILS		
ITEM	MATERIAL	
Suction & Discharge chambers	304 Stainless steel	
Intermediate chambers	304 Stainless steel	
Impellers	304 Stainless steel	
Impellers spacers	304 Stainless steel	
Shaft	431 Stainless steel	
Mechanical seal	Silicon carbide/carbon/EPDM	
Drain and priming plugs	304 Stainless steel	
Motor base mounting plate	304 Stainless steel	

MOTOR DETAILS		
Туре	Totally enclosed Fan cooled PSC type	
Enclosure	IP54	
Insulation	Class F	
Overload	Manual reset	
Voltage	220-240V	
Speed	50Hz 2850 RPM	

OPERATING PARAMETERS	
Liquid	Clean liquid without solid particles
Temperature	0° to +90°C
Maximum ambient temperature	+50°C
Maximum operating pressure	@0° to +40°C =10Bar , @41° to +90°C =6Bar
Duty	Continuously rated

For your nearest dealer please contact Argon Distributors: 0508 634 341

While every endeavor has been made to publish the correct details, no responsibility will be taken for errors, omissions or changes in product specifications. Davies pumps and the 'dp' logo are registered trademarks of Argon Distributors.