

HYDROPAKXTRA



The **HydroPak®-Xtra** is a complete whole-house system with multi-stage water-treatment ideal for both mains and self-supply water systems. The unique design of the **HydroPak®-Xtra** is the compact plug & play package with pump, filters & UV steriliser all in one unit that is weatherproof, tamper proof and reduces pump noise.

3

Year
Warranty

The HydroPak is covered by the **Argon 3-Year Warranty** for your piece of mind. Register online for extended warranty. argondistributors.co.nz/warranty-registration



Easy As

Convenient lifting handles to make delivery and installation easy. Removable door and lid for easy servicing of filters, UV and pump.

Plumb & Run

Simple plumbing connection with 25mm inlet/outlet ports on either left or right.

*Option to have unfiltered water take off for irrigation.

**Option for 32mm ports

Optimum Control

Pressure gauge on filter outlet and pump controller to show if the filters are blocked and allow for timely replacement.

Durability

Weatherproof housing made of powder-coated galvanised steel is designed to survive the harshest New Zealand conditions. Choice of powder coat colors available. Stainless Steel options available.

Dimensions: 1000mm x 1000mm x400mm

Power Supply

230V 10A single Ph power supply required.



"Amazing, we can now have showers running with irrigation, washing dishes etc and no drop in pressure or flow. Should mention the pressure/for us now 10x. It also is quiet enough to not notice. Pleased to have installed it! Also that the water is filtered is great also!"

*Gem
Masterton 2021*



*Proven solutions
through experience*







Technical Data

MODEL NUMBER	HP150	HP160	HP165	HP166
Pump Model:	DJS 100M	MPRS 0310M	MPRS 0515M	MPRS 0515T
Pump Type	Self Priming pump	Self Priming Multi-Stage		
Pump Sound	Medium	Quiet		
Rated Power:	1Hp	1Hp	1.5Hp	
Maximum Current Consumption	4.5A	4.4A	6.5A	
Pump Flow Rate	30 LPM @ 30M	60 LPM @ 30M	105 LPM @ 30M	
Pressure Controller:	HG 3.1			HG 8 VFD
Power Supply:	230V 1 Ph			
Energy Saving Tank	NA	YES		
Water Temperature Range	0-60°C (Protect from freezing)			
Connection	1" BSP (25mm)			
Warranty	3 Years (extension via registration)			

Performance

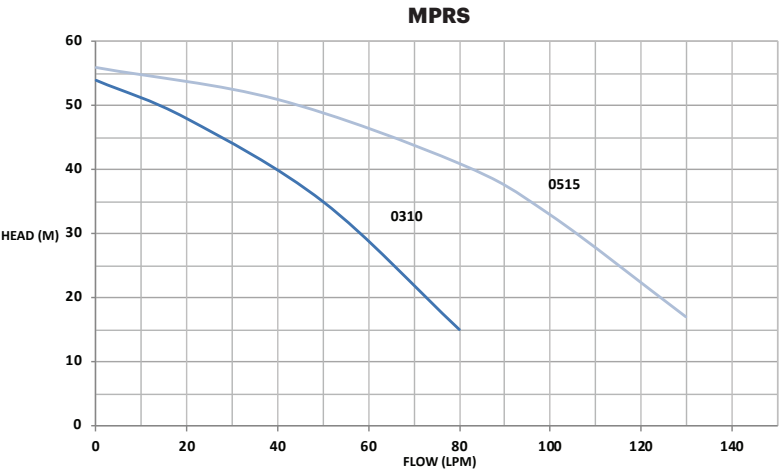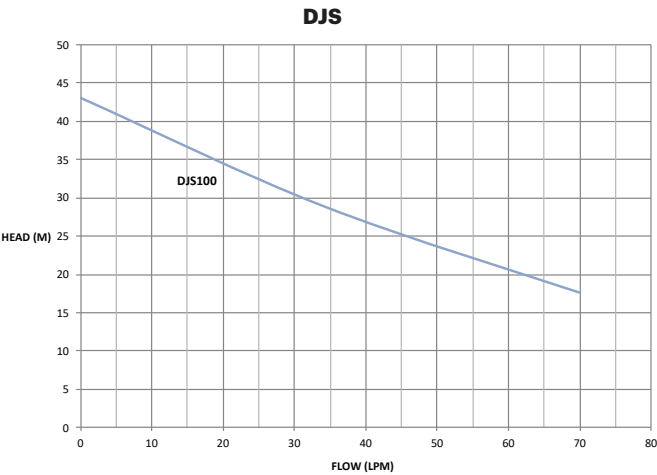

Transport & Installation

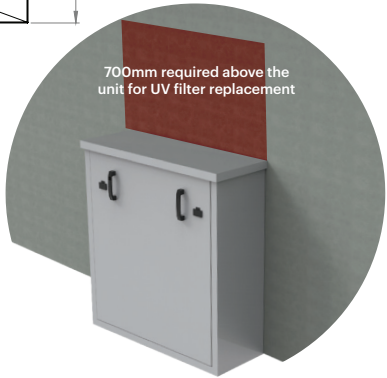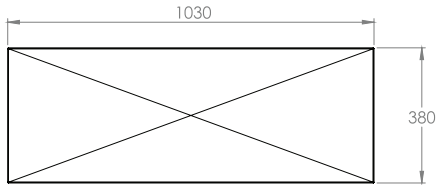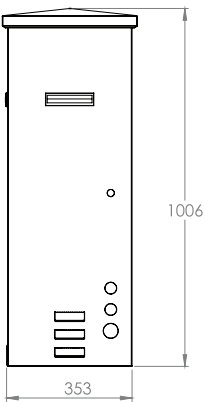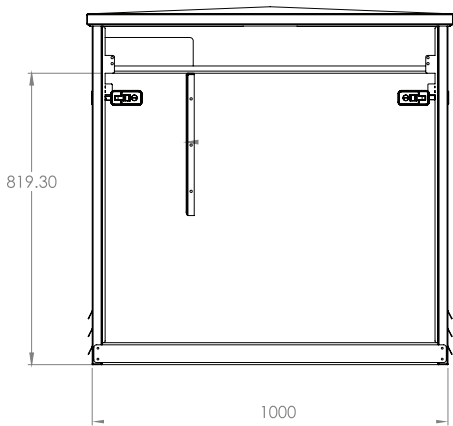

BOX / TRANSPORT DIMENSIONS

Height: 1006 mm
Width: 1030 mm
Depth: 380 mm
Weight: Approx. 110kg

INSTALLATION CLEARANCES

Width: 1200mm total
Front: 1000mm
Height: 1800mm (700mm required above the unit for UV filter replacement)

INSTALLATION GUIDE

Install on hard, level, well-draining surface